




原圖



CIRCUIT DIAGRAM

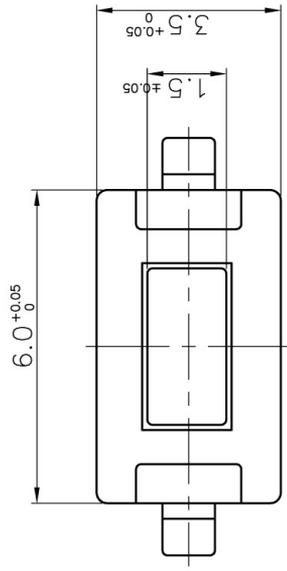

P.C.B LAND PATTERN

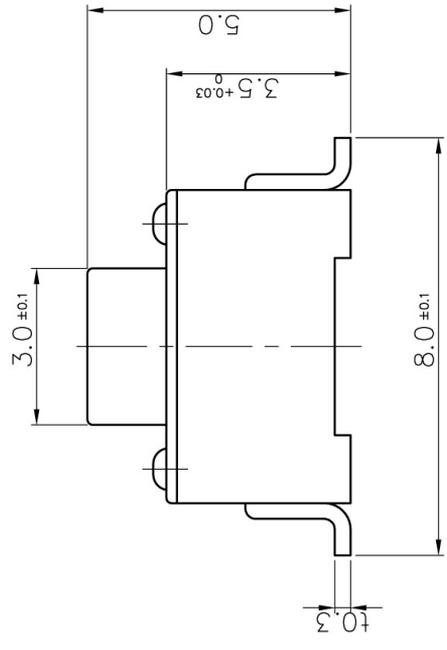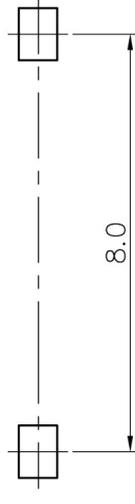

SPECIFICATION

1. RATING : DC 12V 50mA
2. OPERATING FORCE : 130,180 or 250 gf
3. TRAVEL : 0.25 ±0.1mm
4. CONTACT RESISTANCE : 100mΩ MAX
- 5.

| | | |
|------------|-----------|--------------|
| LIFE CYCLE | 130,180gf | 50,000 CYCLE |
| | 250gf | 30,000 CYCLE |

| | | |
|--------------|------|-------------------------|
| REVISION NO. | DATE | DESCRIPTION OF REVISION |
| ④ | | |
| ③ | | |
| ② | | |
| ① | | |

| | | | | | | | | |
|--------|-------|-----------|---------|------|----------|----------------|------|--------|
| DESIGN | CHECK | PART NAME | APPROVE | Q'TY | MATERIAL | HEAT TREATMENT | SPEC | REMARK |
| | | | | | | | | |

| | | | |
|-------|-------------|-----------|---------------|
| SCALE | TITLE | MODEL NO. | DATE |
| 1 / 1 | TACT SWITCH | 1101NEA | 2004. 07. 09. |

EASTERN ELECTRONICS